


OF14BS2 Gas point with flowmeter



DESCRIPTION

Gas points manage downstream flow. They consist of a 2-way inlet ball valve, a pressure reducing valve preset to 3.5 bar and a 30 l/min brass flow meter. The components are integrated in an AISI 304 housing equipped with brackets for wall mounting. Pressure is controlled by a diaphragm and a shutter, which guarantee precision and repeatability.

Applications: pneumatic, industry, welding, laboratory, chemical, test benches and gas chromatographs.

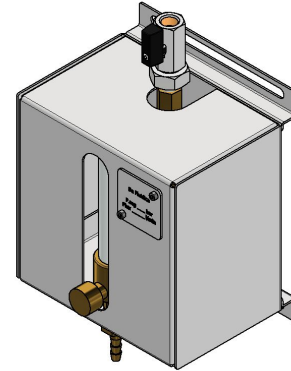

TECHNICAL DATA

MAXIMUM INLET PRESSURE	40 bar
SETTING	3,5 bar (preset)
IN/OUT CONNECTIONS	IN 1/4" G-F OUT 1/4" G-F with hose barb
FLOW	30 lt/min
MATERIAL	Body - chrome-plated brass Inner parts - brass
TEMPERATURE	-20°C → +80°C Other temperatures upon request
FLUIDS	Mixture Ar/CO2
WEIGHT	2,5 kg
CERTIFICATES	PED 2014/68/UE
SPARE PARTS KIT	Wear parts

DIMENSIONAL DRAWINGS

